



EXIT DEVICES

Dimensions

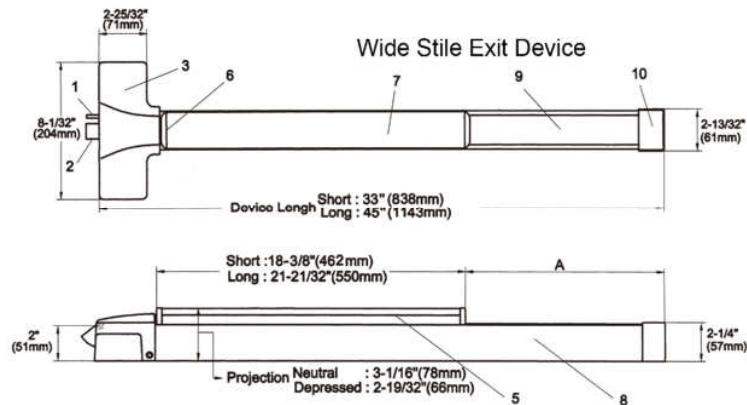

Parts Material

Auxiliary Guarded Latch	Stainless steel
Latch bolt, 3/4" (19mm) throw	Stainless steel
Chassis Cover	Nonferrous alloy or stainless steel
Chassis	Plated steel
Push Bar	Extruded aluminum
Push Bar End Cap	Nonferrous alloy
Push Bar Trim	Brass, stainless steel, steel
Mechanism Housing (or device body)	Extruded aluminum
Dogging Plate (or device body)	Extruded aluminum
End Cap	Nonferrous alloy
Top Latch, 5/8" (16mm) throw	Stainless steel
Latch Assembly Cover	Brass, stainless steel, steel
Top Vertical Rod & Rod Guide	Strong aluminum tube
Bottom Vertical Rod	Strong aluminum tube
End Cap Bracket	Plated steel
Bottom Latch, 5/8" (16mm) throw	Stainless steel

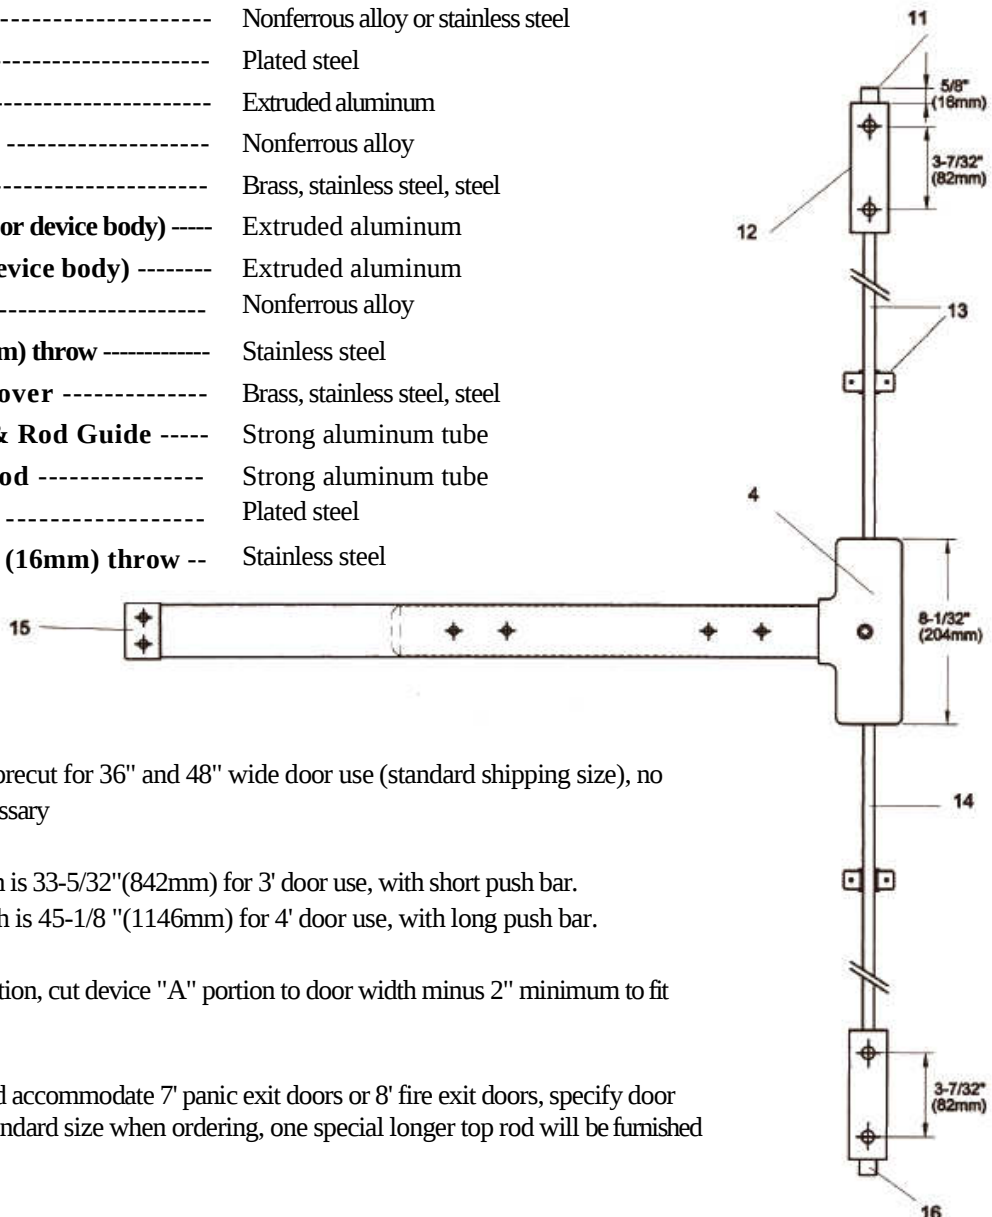

Device Length

The device lengths are pre-cut for 36" and 48" wide door use (standard shipping size), no additional cutting is necessary

Short 36": Device length is $33\frac{5}{32}"$ (842mm) for 3' door use, with short push bar.

Long 48": Device length is $45\frac{1}{8}"$ (1146mm) for 4' door use, with long push bar.

For narrow door installation, cut device "A" portion to door width minus 2" minimum to fit properly.

Our standard vertical rod accommodate 7' panic exit doors or 8' fire exit doors, specify door height if greater than standard size when ordering, one special longer top rod will be furnished