


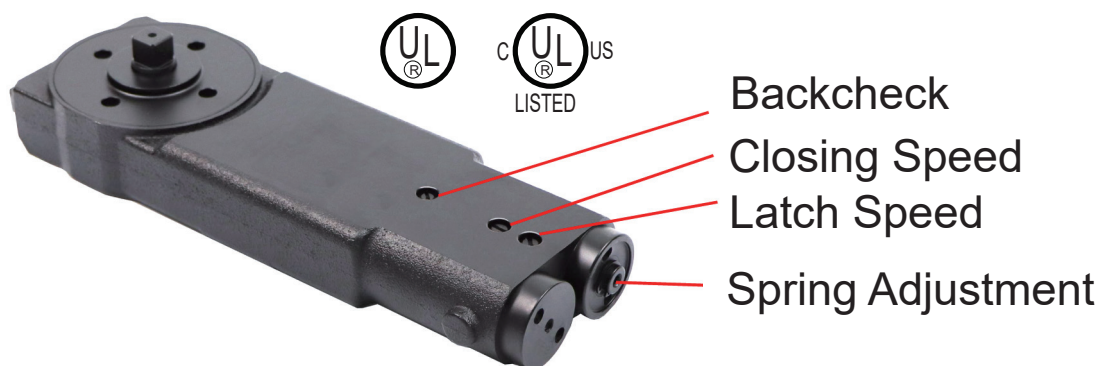

SCHC2000-BC SERIES ADJUSTABLE POWER TYPE

- UL & CUL LISTED, UL10C FIRE RATED for non-hold open.
- ANSI A156.4 Grade 1 Certified.
- Suited for both center-hung and offset doors (double or single acting).
- Operates with all-weather fluid.
- Features adjustable closing speed, latching speed, and backcheck.
- Interchangeable with other brand hole patterns.
- Cast Iron construction ensures lasting durability.
- Standard 1/2" (12.7 mm) spindle.
- Suitable for wood, metal, or aluminum doors over 1 3/4" (44.5 mm) thick.
- Fits inside standard aluminum frame header for improved aesthetics and increased security.
- 90 and 105 standard opening with optional hold open.
- Adjustable Spring power 1 to 3 or 3 to 5.
- Lifetime Warranty against defects.

SCHC2000 Series Adjustable Power Type (1" = 25.4 mm)

Item No.	Max Door	Door Weight Opening	Power Size	Maximum Opening	Remark
SCHC2013-90-BC	32" TO 48" X 96"	200 LB.	SIZE 1-3	90°	NON-HOLD OPEN 90°, UL LISTED
SCHC2013-90H-BC	32" TO 48" X 96"	200 LB.	SIZE 1-3	90°	HOLD OPEN 90°
SCHC2013-105-BC	32" TO 48" X 96"	200 LB.	SIZE 1-3	105°	NON-HOLD OPEN 105°, UL LISTED
SCHC2013-105H-BC	32" TO 48" X 96"	200 LB.	SIZE 1-3	105°	HOLD OPEN 105°
SCHC2035-90-BC	36" TO 48" X 96"	250 LB.	SIZE 3-5	90°	NON-HOLD OPEN 90°, UL LISTED
SCHC2035-90H-BC	36" TO 48" X 96"	250 LB.	SIZE 3-5	90°	HOLD OPEN 90°
SCHC2035-105-BC	36" TO 48" X 96"	250 LB.	SIZE 3-5	105°	NON-HOLD OPEN 90°, UL LISTED
SCHC2035-105H-BC	36" TO 48" X 96"	250 LB.	SIZE 3-5	105°	HOLD OPEN 105°

For standard applications use sizes 3, 4, and 5. For 5 lb. ADA interior use spring size must be set to size 1. For 8-1/2 lb. ADA exterior use spring size must be set to size 2.

DOOR CLOSER ACCESSORIES

Overhead Concealed Door Closer Accessories

ITEM NO.	DESCRIPTION	PHOTO
SCHOHC-2000-FS	ANCHOR SET (STANDARD PACKING INCLUDED)	
SCHARM-2000-S	"S" TYPE SIDE LOAD ARM 1/2" DEPTH TOP RAIL	
SCHARM-2000-A	"A" TYPE END LOAD ARM 1" DEPTH TOP RAIL	
SCHARM-2000-K	"K" TYPE ARM END LOAD ARM 5/8" (16 mm) DEPTH TOP RAIL	
SCHARM-2000-SA	"A" SHORT TYPE END LOADING ARM (1" DEPTH TOP RAIL)	
SCHARM-2000-PT	"PT" TYPE END LOADING TOP ARM ASSEMBLY 7/8" (22 mm) DEPTH TOP RAIL	
SCHARM-2000-JO	"JO" TYPE OFFSET ARM 9/16" (14 mm) NARROW TOP RAIL	
SCHARM-2000-VO	"VO" TYPE OFFSET ARM 7/8" (22 mm) DEPTH TOP RAIL	
SCHOHC-2000-DP	ADJUSTABLE DUAL PURPOSE BOTTOM PIVOT SET (STANDARD)	
SCHOHC-2000-GE	ADJUSTABLE THRESHOLD MOUNT BOTTOM PIVOT SET (OPTIONAL)	
SCHOHC-2000-G	ADJUSTABLE FLOOR MOUNT BOTTOM PIVOT SET (OPTIONAL)	
SCHC2000-DUMMY	OHC DUMMY CLOSER (NON-FUNCTIONAL WORKS AS A PIVOT ONLY)	