


FLUSHBOLT

SCHFB1 FLUSHBOLT

- 15/16" x 4 1/4" radius faceplate
- Positive "U" joint actuator with 5/8" bolt throw
- Available offsets:
1/8", 3/16", and 1/4" with a 7/8" backset
- Rod length designed for 12" centerline face installation
- Square nylon tip with beveled corners – fits into a 1/2" square hole
- Finishes available:
AL – Baked satin aluminum paint
BK – Baked black paint
DU – Baked storefront bronze paint

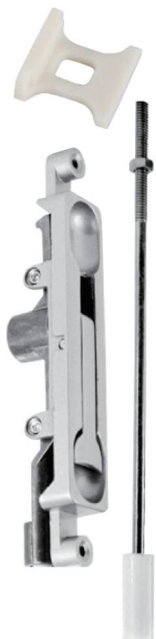

Ordering Information

SCHFB1 Flush Bolt (Includes guide)

- 1/8" offset
- 1/4" offset
- 3/16" offset

Specify: Model Number and Finish

SCHFB1 AND SCHFB2

FLUSHBOLT EXTENSION ROD

- 1/4-20 x 12" Threaded rod
- Includes coupler

SCHFB2 FLUSHBOLT

- 15/16" x 4 1/4" radius faceplate
- Positive "U" joint actuator with 7/8" bolt throw
- Available offsets:
1/8" and 1/4" with a 7/8" backset
- Rod length designed for 12" centerline face installation
- Square nylon tip with beveled corners – fits into a 1/2" square hole
- Finishes Available:
AL – Baked satin aluminum paint
BK – Baked black paint
DU – Baked storefront bronze paint



Ordering Information

SCHFB2 Flush Bolt
(Includes guide)

- 1/8" offset
- 1/4" offset

Specify: Model Number and Finish

SCHFB1 AND SCHFB2

STANDARD FLUSHBOLT GUIDE



MODEL	FACEPLATE SIZE	BOLT THROW	OFFSETS AVAILABLE	BACKSET	ROD LENGTH	TIP TYPE	FINISHES
SCHFB1	15/16" x 4 1/4"	5/8"	1/8", 3/16", 1/4"	7/8"	12"	Square Nylon	AL, BK, DU
SCHFB2	15/16" x 4 1/4"	7/8"	1/8", 1/4"	7/8"	12"	Square Nylon	AL, BK, DU

Installation Guidelines For optimal performance, follow these installation best practices:

- **Ensure Proper Alignment** – Flush bolt aligns well with the strike plate to ensure smooth locking / unlocking.
- **Drill Clean Cutouts** – Use sharp drill bits to create precise cutouts for the faceplate and bolt mechanism.
- **Securely Fasten Screws** – Over-tightening can strip the screw holes, loose screws can cause misalignment.
- **Test the Movement** – After installation, engage / disengage the bolt several times to check smooth operation.