



EXIT DEVICES

Dimensions

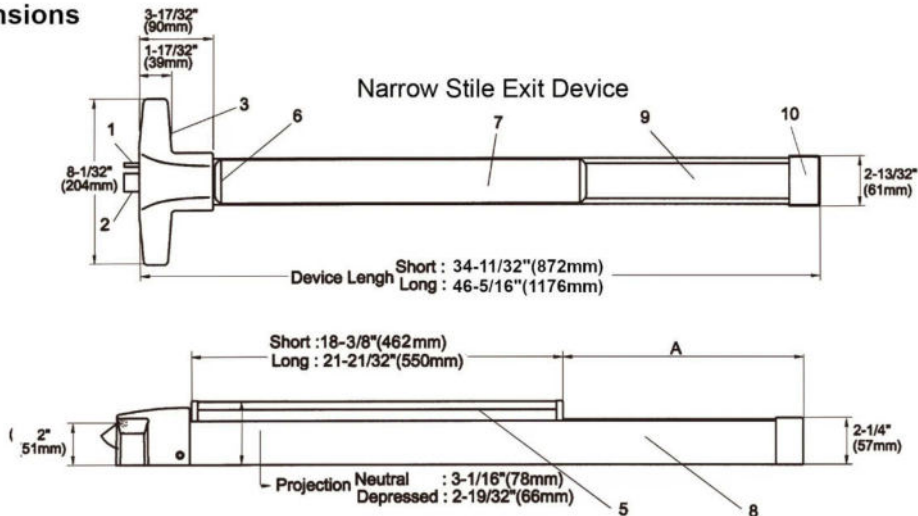

Parts Material

1. Auxiliary Guarded Latch -----	Stainless steel
2. Latch bolt, 3/4" (19mm) throw -----	Stainless steel
3. Chassis Cover (or called Head Cover) -	Nonferrous alloy or stainless steel
4. Chassis -----	Plated steel
5. Push Bar -----	Extruded aluminum
6. Push Bar End Cap -----	Nonferrous alloy
7. Push Bar Trim -----	Brass, stainless steel, steel
8. Mechanism Housing (or device body) -	Extruded aluminum
9. Dogging Plate (or called rear cover) --	Extruded aluminum
10. End Cap -----	Nonferrous alloy
11. Top Latch, 5.8" (16mm) throw ----	Stainless steel
12. Latch Assemble Cover -----	Brass, stainless steel, steel
13. Top Vertical Rod & Rod Guide ---	Strong aluminum tube
14. Bottom Vertical Rod -----	Strong aluminum tube
15. End Cap Bracket -----	Plated steel
16. Bottom Latch, 5/8" (16mm) throw	Stainless steel

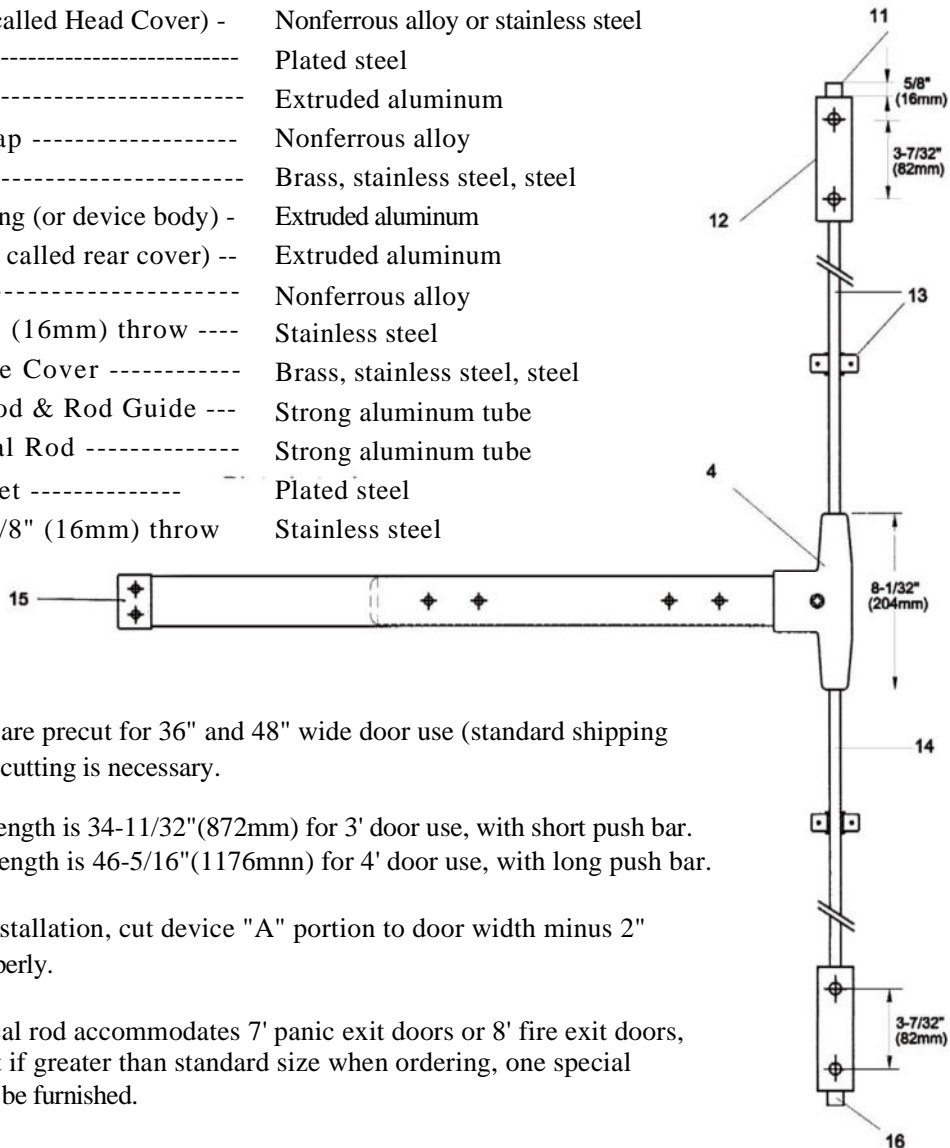

Device Length

The device lengths are precut for 36" and 48" wide door use (standard shipping size), no additional cutting is necessary.

Short 36": Device length is 34-11/32" (872mm) for 3' door use, with short push bar.

Long 48": Device length is 46-5/16" (1176mm) for 4' door use, with long push bar.

For narrow door installation, cut device "A" portion to door width minus 2" minimum to fit properly.

Our standard vertical rod accommodates 7' panic exit doors or 8' fire exit doors, specify door height if greater than standard size when ordering, one special longer top rod will be furnished.