

SURFACE MOUNTED DOOR CLOSERS

Heavy Duty Commercial Door Closer Grade 1 Certified

SCH8916BC



CONFORMS TO STANDARDS
UL 10C AND UBC 7-2 (1997)



SCH8916BC DOOR CLOSERS CROSS REFERENCES

SCH	DORMA	HAGER	LCN	NORTON	PARKER	SARGENT	YALE
SCH8916BC	640/7300/7400	5300	1070/1370	1600	900	1130	50

- UL and cUL listed; UL 10C fire-rated.
- ANSI A 156.4 Grade 1 certified.
- ADA compliant.
- Adjustable spring power sizes 1 to 6.
- Cast aluminum body with a forged steel arm.
- Standard adjustable sweep and latching speed.

- Standard self-tapping & self-drilling screws.
- Standard tri-pack for regular arm, top jamb, and parallel arm bracket.
- Standard adjustable backcheck.
- Durable plastic cover.
- Lifetime warranty.


Finishes:

- AL (Alum)
- DU (Duro)
- BK (Black)

TECHNICAL DIMENSIONS

Optional Features

- Drop Plate
- Hold Open Arm

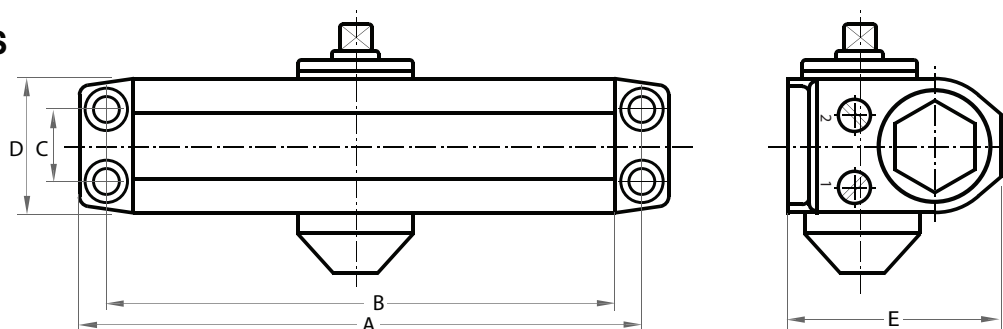

DESCRIPTION	DIMENSIONS	DESCRIPTION	DIMENSIONS
A. Length of Closer Body	9 3/4" (247.65 mm)	C. Vertical Mounting Holes	3/4" (19.05 mm)
B. Horizontal Mounting Holes	9 1/16" (230.19 mm)	D. Closer Body Height	1 13/16" (46.04 mm)
		E. Projection from Door	2 3/4" (69.85 mm)

ACCESSORIES



SCH8916LDP
Left Drop Plate



SCH8916NDP
Narrow Drop Plate



SCH8916HOARM
Hold-Open Arm